

Silicon Diode

GL41K

800V / 1A

DATASHEET

from


www.web-bcs.com

OEM – General Semiconductor

Source: General Semiconductor Databook 1998

BYM10-50 THRU BYM10-1000 GL41A THRU GL41Y

SURFACE MOUNT GLASS PASSIVATED JUNCTION RECTIFIER
Reverse Voltage - 50 to 1600 Volts Forward Current - 1.0 Ampere

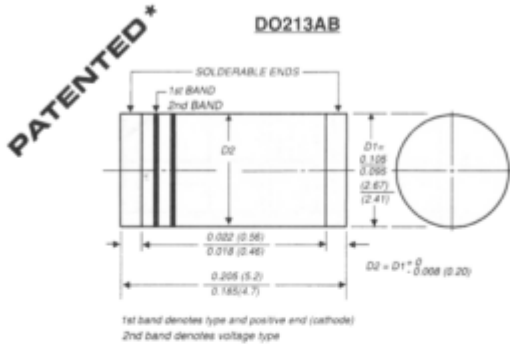

1st band denotes type and positive end (cathode)
2nd band denotes voltage type

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation technique is covered by Patent No. 3,996,602 and brazed-end cap assembly by Patent No. 3,930,306



FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ For surface mount applications
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ High temperature soldering guaranteed: 450°C/5 seconds at terminals. Complete device submersible temperature of 265°C for 10 seconds in solder bath



MECHANICAL DATA

Case: JEDEC DO-213AB molded plastic over glass body
Terminals: Plated terminals, solderable per MIL-STD-750, Method 2026
Polarity: Two bands indicate cathode-end -1st band denotes device type and 2nd band denotes repetitive peak reverse voltage rating
Mounting Position: Any
Weight: 0.0046 ounce, 0.116 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	BYM10				BYM10					UNITS
		-50 GL41A	-100 GL41B	-200 GL41D	-400 GL41G	-600 GL41J	-800 GL41K	-1000 GL41M	GL41T	GL41Y	
Standard recovery device: 1st band is white											
Polarity color bands (2nd Band)		Gray	Red	Orange	Yellow	Green	Blue	Violet	White	Brown	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	1300	1600	Volts
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	910	1120	Volts
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	1300	1600	Volts
Maximum average forward rectified current (SEE FIG. 1)	I(AV)	1.0									Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	30.0									Amps
Maximum instantaneous forward voltage at 1.0A	VF	1.1				1.2					Volts
Maximum DC reverse current at rated DC blocking voltage	IR					10.0 50.0					µA
Maximum full load reverse current full cycle average at TA=75°C	IR(AV)	30.0									µA
Typical junction capacitance (NOTE 1)	CJ	8.0									pF
Typical thermal resistance (NOTE 2) (NOTE 3)	REJA REJT	75.0 30.0									°C/W
Operating junction and storage temperature range	TJ, TSTG	-65 to +175									°C

NOTES:

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Vdc
- (2) Thermal resistance from junction to ambient, 0.24 x 0.24" (6.0 x 6.0mm) copper pads to each terminal
- (3) Thermal resistance from junction to terminal, 0.24 x 0.24" (6.0 x 6.0mm) copper pads to each terminal

RATINGS AND CHARACTERISTIC CURVES BYM10-50 THRU BYM10-600 / GL41A THRU GL41Y

