

# Bridge Rectifier

## **KBP06M**

600V / 1,5A

# DATASHEET

from

[www.web-bcs.com](http://www.web-bcs.com)


OEM – General Semiconductor

Source: General Semiconductor Databook 1998

# KBP005M THRU KBP10M 3N246 THRU 3N252

**GLASS PASSIVATED SINGLE-PHASE RECTIFIER BRIDGE**  
Reverse Voltage - 50 to 1000 Volts    Forward Current - 1.5 Amperes

**Case Style KBPM**

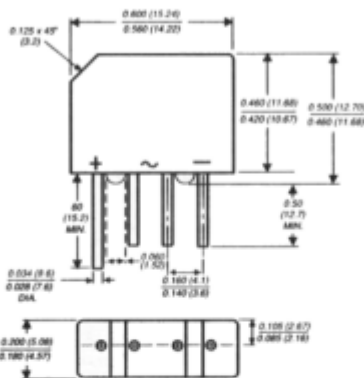


*Polarity shown on front side of case: positive lead by beveled corner*

*Dimensions in inches and (millimeters)*

**FEATURES**

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- This series is UL listed under Recognized Component Index, file number E54214
- Glass passivated chip junctions
- High surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs. (2.3kg) tension



**MECHANICAL DATA**

**Case:** Molded plastic body over passivated junctions  
**Terminals:** Plated lead solderable per MIL-STD-750, Method 2026  
**Polarity:** Polarity symbols marked on case  
**Mounting position:** Any  
**Weight:** 0.06 ounce, 1.7 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	KBP 005M 3N246	KBP 01M 3N247	KBP 02M 3N248	KBP 04M 3N249	KBP 06M 3N250	KBP 08M 3N251	KBP 10M 3N252	UNITS
* Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
* Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
* Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward output rectified current at T <sub>A</sub> =40°C	I <sub>(AV)</sub>	1.5							Amps
* Peak forward surge current single half sine-wave superimposed on rated load (JEDEC Method) T <sub>J</sub> =150°C	I <sub>FSM</sub>				50.0				Amps
Rating for fusing (t < 8.3ms)	I <sub>t</sub>				10.0				A <sup>2</sup> sec
* Maximum instantaneous forward voltage drop at 1.0A per leg 1.57A per leg	V <sub>F</sub>				1.0				Volts
* Maximum DC reverse current at rated DC blocking voltage per leg T <sub>A</sub> =25°C T <sub>A</sub> =125°C	I <sub>R</sub>				5.0				µA
Typical junction capacitance per leg (NOTE 1)	C <sub>J</sub>				15.0				pF
Typical thermal resistance per leg (NOTE 2)	R <sub>θJA</sub> R <sub>θJL</sub>				40.0				°C/W
* Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150							°C

**NOTES:**

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (2) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with, 0.47 x 0.47" (12 x 12mm) copper pads
- \* JEDEC registered values

**RATINGS AND CHARACTERISTICS CURVES KBP005M THRU KBP10M / 3N246 THRU 3N252**

