

Silicon Diode

BYX108G

4.5kV/340mA

DATASHEET

OEM – Philips

Source: Philips Databook 1999

High-voltage soft-recovery controlled avalanche rectifiers

BYX105G to BYX108G

FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Recovery times ranging from 600 to 50 ns
- Soft-recovery switching characteristics
- Compact construction.

DESCRIPTION

Rugged glass package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

The package is designed to be used in an insulating medium such as resin, oil or SF6 gas.

See also the chapter on custom made high-voltage rectifiers in the "General Part of Handbook SC01".

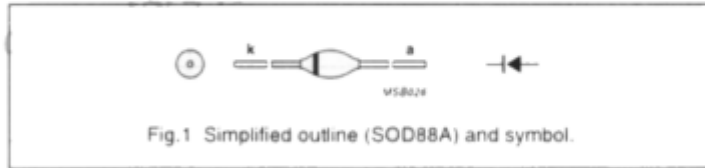


Fig.1 Simplified outline (SOD88A) and symbol.

APPLICATIONS

- High-voltage power supply units in, for example, X-ray or radar systems.

MARKING

TYPE NUMBER	CATHODE BAND
BYX105G	black
BYX106G	red
BYX107G	green
BYX108G	violet

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RRM}	repetitive peak reverse voltage		–	5	kV
V_{RW}	working reverse voltage		–	4.5	kV
$I_{F(AV)}$	average forward current	averaged over any 20 ms period; $T_{case} = 25\text{ °C}$	–	650	mA
	BYX105G		–	650	mA
	BYX106G		–	575	mA
	BYX107G		–	480	mA
	BYX108G		–	340	mA
$I_{F(AV)}$	average forward current	averaged over any 20 ms period; $T_{case} = 70\text{ °C}$	–	460	mA
	BYX105G		–	460	mA
	BYX106G		–	400	mA
	BYX107G		–	340	mA
	BYX108G		–	240	mA
I_{FSM}	non-repetitive peak forward current	$t = 10\text{ ms}$; half sinewave; $T_j = 45\text{ °C}$ prior to surge	–	20	A
	BYX105G		–	20	A
	BYX106G		–	15	A
	BYX107G		–	14	A
	BYX108G		–	14	A

High-voltage soft-recovery
controlled avalanche rectifiers

BYX105G to BYX108G

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
P_{RSM}	non-repetitive peak reverse power dissipation	$t = 10 \mu\text{s}$; triangular pulse; $T_j = T_{j\text{max}}$ prior to surge	–	2	kW
T_{stg}	storage temperature		–65	+175	°C
T_j	junction temperature		–65	+175	°C

ELECTRICAL CHARACTERISTICS

$T_j = 25 \text{ °C}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	forward voltage	$I_F = 1 \text{ A}$; $T_j = 165 \text{ °C}$	–	–	9.3	V
	BYX105G					
	BYX106G					
	BYX107G					
V_F	forward voltage	$I_F = 1 \text{ A}$	–	–	10.9	V
	BYX105G					
	BYX106G					
	BYX107G					
I_R	reverse current	$V_R = V_{RW\text{max}}$	–	–	15	μA
		$V_R = V_{RW\text{max}}$; $T_j = 165 \text{ °C}$	–	–	50	μA
t_{rr}	reverse recovery time	when switched from $I_F = 50 \text{ mA}$ to $I_R = 100 \text{ mA}$; measured at $I_R = 25 \text{ mA}$	–	–	600	ns
	BYX105G					
	BYX106G					
	BYX107G					
t_{rr}	reverse recovery time		–	–	175	ns
	BYX108G					

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j\text{-oil}}$	thermal resistance from junction to oil	note 1	20	K/W

Note

- For more information please refer to the "General Part of Handbook SC01".