

# Silicon PNP Transistor

## BD376


# DATASHEET

Medium Power And Switching Applications

Technical Data (Short Form):

Case: TO-126

|     |   |        |
|-----|---|--------|
| Ucb | - | 50V    |
| Uce | - | 45V    |
| Ic  | - | 2A     |
| N   | - | 25W    |
| F   | - | -      |
| hFE | - | 40-375 |



1. Emitter 2. Collector 3. Base

OEM: Samsung


Source: Samsung CD 1995

## MEDIUM POWER LINEAR AND SWITCHING APPLICATIONS

• Complement to BD375, BD377 and BD379 respectively

### ABSOLUTE MAXIMUM RATINGS ( $T_c = 25^\circ\text{C}$ )

| Characteristic                                     | Symbol    | Rating    | Unit             |
|--|-----------|-----------|------------------|
| Collector Base Voltage : BD376                     | $V_{CBO}$ | -50       | V                |
| : BD378  |           | -75       | V                |
| : BD380  |           | -100      | V                |
| Collector Emitter Voltage: BD376                   | $V_{CEO}$ | -45       | V                |
| : BD378  |           | -60       | V                |
| : BD380  |           | -80       | V                |
| Emitter Base Voltage                               | $V_{EBO}$ | -5        | V                |
| Collector Current (DC)                             | $I_C$     | -2        | A                |
| Collector Current (Pulse)                          | $I_c$     | -3        | A                |
| Base Current                                       | $I_B$     | -1        | A                |
| Collector Dissipation ( $T_c = 25^\circ\text{C}$ ) | $P_C$     | 25        | W                |
| Junction Temperature                               | $T_J$     | 150       | $^\circ\text{C}$ |
| Storage Temperature                                | $T_{stg}$ | -55 ~ 150 | $^\circ\text{C}$ |

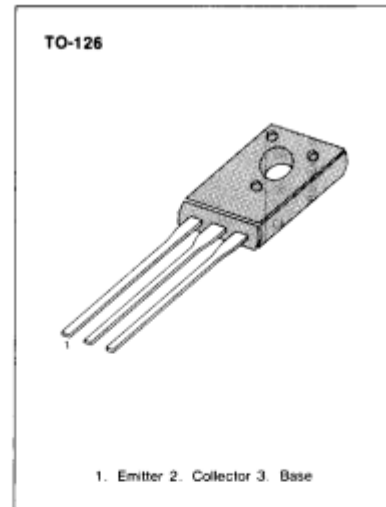

### ELECTRICAL CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ )

| Characteristic                               | Symbol         | Test Condition   | Min                             | Typ | Max  | Unit          |               |
|--|----------------|--|---------------------------------|-----|------|---------------|---------------|
| *Collector Emitter Sustaining Voltage: BD376 | $V_{CEO(SUS)}$ | $I_C = -100\text{mA}, I_B = 0$   | -45                             |     |      | V             |               |
| : BD378                                      |                |  | -60                             |     |      | V             |               |
| : BD380                                      |                |  | -80                             |     |      | V             |               |
| Collector Base Voltage : BD376               | $V_{CBO}$      | $I_C = -100\mu\text{A}, I_E = 0$   | -50                             |     |      | V             |               |
| : BD378                                      |                |  | -75                             |     |      | V             |               |
| : BD380                                      |                |  | -100                            |     |      | V             |               |
| Collector Cutoff Current : BD376             | $I_{CBO}$      | $V_{CB} = -45\text{V}, I_E = 0$  |                                 |     | -2   | $\mu\text{A}$ |               |
| : BD378                                      |                |  | $V_{CB} = -60\text{V}, I_E = 0$ |     |      | -2            | $\mu\text{A}$ |
| : BD380                                      |                |  | $V_{CB} = -80\text{V}, I_E = 0$ |     |      | -2            | $\mu\text{A}$ |
| Emitter Cutoff Current                       | $I_{EBO}$      | $V_{EB} = -5\text{V}, I_C = 0$   |                                 |     | -100 | $\mu\text{A}$ |               |
| *DC Current Gain                             | $h_{FE1}$      | $V_{CE} = -2\text{V}, I_C = -0.15\text{A}$                                       | 40                              |     | 375  |               |               |
|  | $h_{FE2}$      | $V_{CE} = -2\text{V}, I_C = -1\text{A}$  | 20                              |     |      |               |               |
| *Collector Emitter Saturation Voltage        | $V_{CE(sat)}$  | $I_C = -1\text{A}, I_B = -0.1\text{A}$   |                                 |     | -1   | V             |               |
| *Base Emitter On Voltage                     | $V_{BE(on)}$   | $V_{CE} = -2\text{V}, I_C = -1\text{A}$  |                                 |     | -1.5 | V             |               |
| Turn On Time                                 | $t_{on}$       | $V_{CC} = -30\text{V}, I_C = -0.5\text{A}$<br>$I_{B1} = -0.05\text{A}$           |                                 | 50  |      | nS            |               |
| Turn Off Time                                | $t_{off}$      | $V_{CC} = -30\text{V}, I_C = -0.5\text{A}$<br>$I_{B1} = -I_{B2} = -0.05\text{A}$ |                                 | 500 |      | nS            |               |

\*Pulse Test: PW = 300 $\mu\text{s}$ , duty cycle = 2% pulsed

### $h_{FE}$ (1) CLASSIFICATION

| Classification | 6      | 10     | 16      | 25      |
|----------------|--------|--------|---------|---------|
| $h_{FE1}$      | 40-100 | 63-160 | 100-250 | 150-375 |

